



UNIVERSAL JOINT

K TYPE

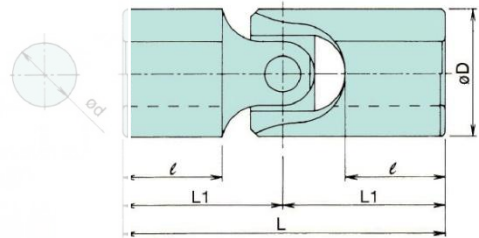

K型

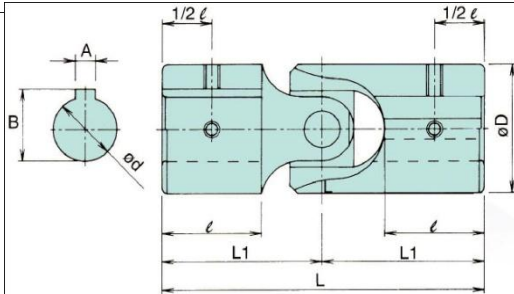

K-KT型



| | | | | | | | | | | | | UNIT=m/m | |
|-------|--------|------------|-----------|----------|-----|-----|-----|----------------|-----|--------------------|-----|----------|--|
| MODEL | SPECIF | Ma (kgf-m) | M (kgf-m) | Angle(°) | Ød | ØD | L | L ₁ | l | A×B ^{JS9} | M | (g) | |
| K-6 | - | 0.8 | 1.6 | 15 | 6 | 12 | 33 | 16.5 | 10 | - | - | 19 | |
| K-8 | - | 1.5 | 3.2 | 15 | 8 | 16 | 40 | 20.0 | 11 | - | - | 45 | |
| K-10 | K-10KT | 3.0 | 7.5 | 15 | 10 | 20 | 45 | 22.5 | 13 | 3×11.8 | M5 | 85 | |
| K-12 | K-12KT | 4.5 | 12.0 | 15 | 12 | 24 | 51 | 25.5 | 14 | 4×13.8 | M5 | 130 | |
| K-14 | K-14KT | 7.0 | 17.0 | 15 | 14 | 28 | 61 | 30.5 | 17 | 5×16.3 | M6 | 205 | |
| K-16 | K-16KT | 10.0 | 25.0 | 15 | 16 | 32 | 69 | 34.5 | 19 | 5×18.3 | M6 | 295 | |
| K-18 | K-18KT | 13.0 | 32.0 | 15 | 18 | 36 | 77 | 38.5 | 21 | 6×20.8 | M6 | 427 | |
| K-20 | K-20KT | 18.0 | 45.0 | 15 | 20 | 40 | 87 | 43.5 | 24 | 6×22.8 | M6 | 520 | |
| K-22 | K-22KT | 24.0 | 60.0 | 15 | 22 | 44 | 95 | 47.5 | 26 | 6×24.8 | M6 | 800 | |
| K-25 | K-25KT | 30.0 | 80.0 | 15 | 25 | 50 | 111 | 55.5 | 30 | 8×28.3 | M8 | 1100 | |
| K-30 | K-30KT | 45.0 | 115.0 | 15 | 30 | 60 | 130 | 65.0 | 37 | 8×33.3 | M8 | 2000 | |
| K-35 | K-35KT | 55.0 | 180.0 | 15 | 35 | 70 | 149 | 74.5 | 41 | 10×38.3 | M8 | 3200 | |
| K-40 | K-40KT | 85.0 | 250.0 | 15 | 40 | 80 | 167 | 83.5 | 46 | 12×43.3 | M10 | 4700 | |
| K-45 | K-45KT | 125.0 | 350.0 | 15 | 45 | 90 | 205 | 102.5 | 51 | - | - | 7350 | |
| K-50 | K-50KT | 180.0 | 490.0 | 15 | 50 | 100 | 228 | 114.0 | 59 | - | - | 8200 | |
| K-60 | K-60KT | 280.0 | 650.0 | 15 | 60 | 120 | 270 | 135.0 | 70 | - | - | 16800 | |
| K-70 | - | 450.0 | 1200.0 | 15 | 70 | 135 | 320 | 160.0 | 92 | - | - | 25000 | |
| K-80 | - | 550.0 | 1400.0 | 15 | 80 | 160 | 360 | 180.0 | 110 | - | - | 37000 | |
| K-100 | - | 650.0 | 1900.0 | 15 | 100 | 175 | 500 | 250.0 | 135 | - | - | 66000 | |